

Area of Application

ESSVE drywall screw GU Combi, is intended for installation of outdoor gypsum boards against wooden or steel joists. Drill capacity 0.4-0.9 mm.

Description

ESSVE Drywall screw GU Combi, is a newly developed screw with a flat surface-mounted head.

This design provides a weatherproof installation before the façade cladding is fitted.

The design of the screw conforms to the requirements set out in HusAMA 98 on the installation of outside drywall boards, KBC.111.

The screw is fitted with a combi thread which makes it suitable for installing against wooden

or steel joists max. 0.9 mm.

The screw is made of hardened steel with silver CorrSeal surface treatment, making it suitable for use in outdoor environments. The silver CorrSeal surface treatment realises corrosivity category C4.

Installation

A screwdriver with adjustable depth stop should always be used to ensure correct, quick and efficient installation. The screw must not be countersunk, the surface finish of the board must not be damaged.

Recommended rpm: 30 - 40 mm 2800 - 6000/min.



CorrSeal

ESSVE CorrSeal surface treatment.




Type approved by SITAC No. 0075/05

Specification

Material	Hardened steel SAE 1022
Surface treatment	CorrSeal, wax
Usage	Approx 20 per m ²
Corrosion category	C4

Drywall screw GU Combi outdoor, for wooden/steel joists, CorrSeal

ESSBOX

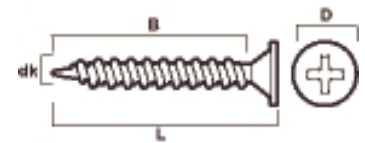

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty/pack.	Pack./large pack.
536130	3.9 x 30	9.0	26.0	PH2	304	1000	4
536140	3.9 x 40	9.0	36.0	PH2	304	500	4